




Heradesign®

CREATIVE

Product data


HERADESIGN® Creative line

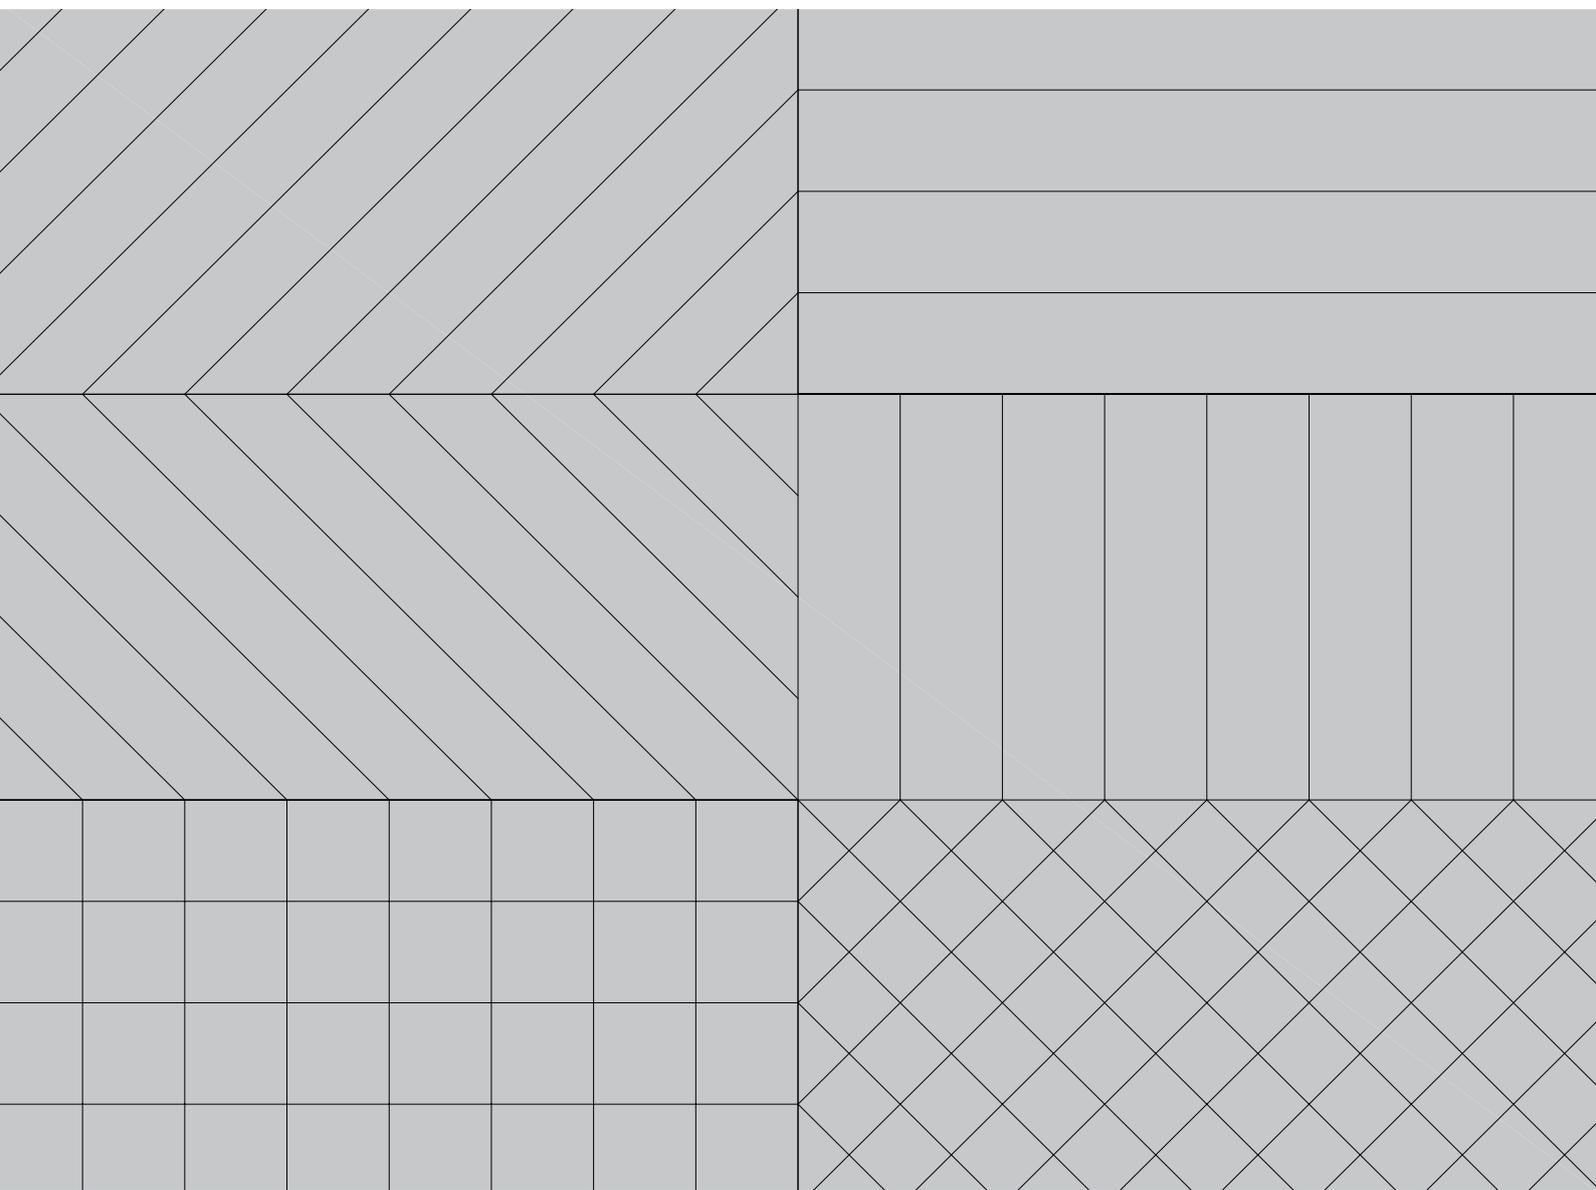




PRODUCT DATA

HERADESIGN® Creative line

**HERADESIGN® fine,
HERADESIGN® fine A2**

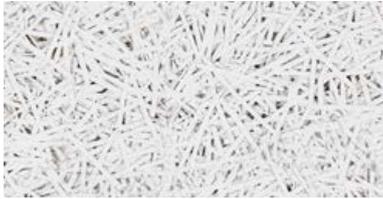

**HERADESIGN® superfine
HERADESIGN® superfine A2**

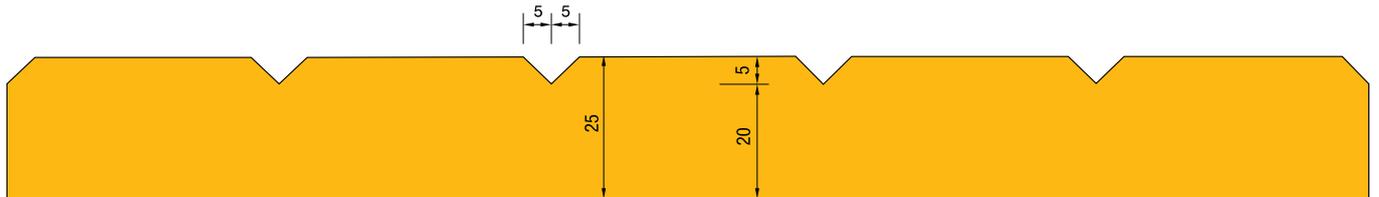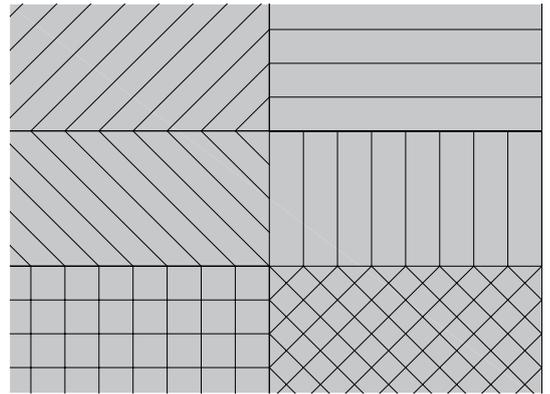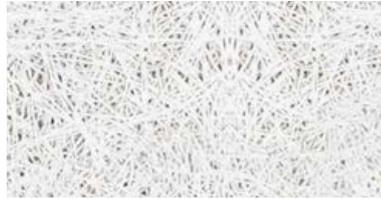

Areas of application

As decorative and acoustically effective sub-ceiling and wall cladding for use in interior rooms and roofed outdoor areas, which are not exposed to direct environmental influences such as rain or pollutants.

Limitations of use

- Maximum span 625 mm!
- Suitable for rooms with a constant humidity of up to 90%.
For applications where there is a constant humidity in excess of 80% construction physics advice is recommended!

Installation

Installation of HERADESIGN® acoustic panels is part of the interior fitting of the building and must only be carried out under conditions of controlled humidity and temperature. All building activities which create dust must be completed

before the start of installation. Store the panels flat and protect against moisture and dirt. The packaging does not protect the products against rain! Also note the relevant application, installation and storage guidelines for HERADESIGN® acoustic panels.

Special information

- Deviations in colour from the edge colour and colour perception are possible due to the rough surface of the fibres or the surface of the panel.
- Manufacturing tolerances in nominal dimensions: L4, W2, T2: ± 1 mm, for lengths > 1250 mm L4: ± 2 mm
- A foil (thickness < 30 µm) is recommended for trickle protection for mineral wool linings.
- Max. changes in dimension in standard climate 23°C/50 % rel. humidity: ±1 %

Colour variants

The natural characteristic structure of the wood wool is ideally suitable as a surface for creative colour schemes. An almost unlimited range of colours is available - almost any colour from popular colour systems such as RAL or NCS, may be selected.

white similar to RAL 9010	beige Natural tone 13	Pastel colours	Solid colours	Metallic colours	Special colours
●	●	●	●	●	●



This product information corresponds to the present state of development of our products and become invalid on the publication of a new version. Always make sure that you use the latest version of this information. The suitability of the product is not binding for special individual cases. Warranties and liability for deliveries are governed by our General Terms of Business. Only defect-free products may be installed. No liability will be accepted for the assembly of defective products or for the resulting costs (delay in delivery, remediation of defects). All data are included without warranty. Version 01/2021 - JB

PRODUCT RANGE

HERADESIGN® Creative line


Panel size: 1200 x 600 mm

Thickness: 25 mm

Line DL 16



Line DL 8

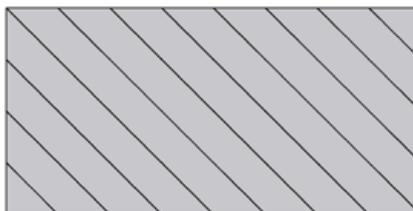


Line DR 16




Line DR 8




Line DLR 16

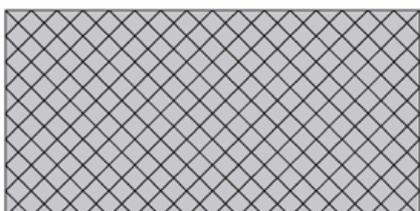


Line DLR 8

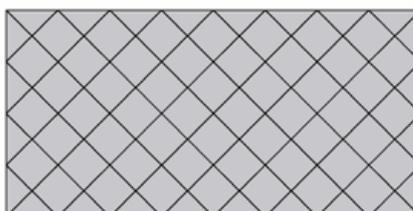

Line V 16

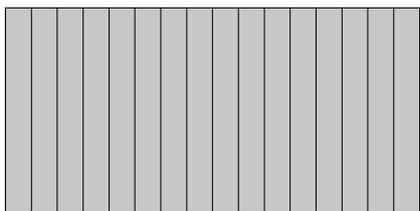

Line V 8

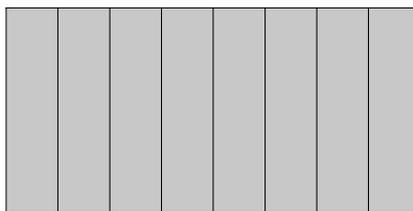


Line H 16



Line H 8



Line VH 16

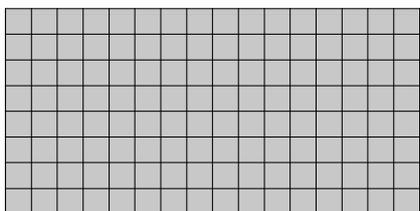

Line VH 8

